

# [ Water Protector ]

Intelligent Building Protection




## FUNCTION

The **Water Protector** provides leakage monitoring in dialysis rooms to prevent water damage.

If a leak is detected by a sensor during the flushing and heat-disinfection phase of the permeate system the Water Protector switches the permeate supply off by intelligent control technology.

With fully automatic heat-disinfection during the dialysis-free and unattended time, the installation of sensors through-out the dialysis centre gives protection against possible water damage.

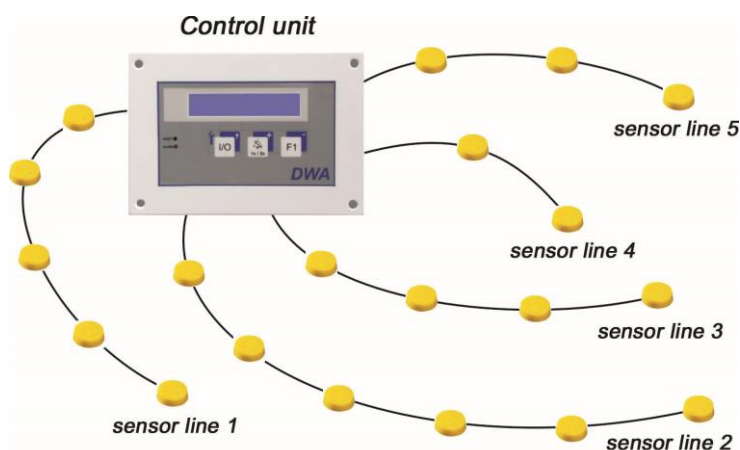

### Your advantages at a glance:

- Optimal building protection
- Connection of up to 5 sensor lines

## CONSTRUCTION

The **Water Protector** consists of one control unit and several sensors. Up to 5 sensor lines can be connected to one control unit. Each sensor line will be fitted with the quantity of sensors which are required for complete area monitoring.

A complete monitoring system consists of one or more control units each with up to 5 sensor lines, which will be connected to a central system - the master unit.

The RO systems modula S, modula S-XL, modula S-TP, nephro TP and the heat-disinfection system nephro SAFE can function as the master unit.



**DWA GmbH & Co. KG**  
The Dialysis Water Specialist

Großer Sand 8  
76698 Ubstadt-Weiher

Phone: +49 7251 6900-0

info@dwa-online.com  
[www.dwa-online.com](http://www.dwa-online.com)